

TurboVUI Dispatch v7 Configuring a Buddy DesktopMic 7G



TurboVUI Technical Note

TN 204

This Technical Note describes the re-configuration of a Buddy DesktopMic 7G.

What you will need

In order to re-configure the firmware in the microphone, download the configuration program from Buddy Microphone's web site:

http://www.buddymicrophones.com/sites/default/files/MyBuddyMicInstaller_1.5.4703.exe

or from CTI's web site:

http://ctiproducts.com/SoftwareDownloads/TurboVUI/MyBuddyMicSetup_2301292_110808.exe

Program start-up


1. Connect the Buddy DesktopMic 7G to the PC using the included USB cable.
2. In the System Tray for your PC, locate the icon for "InSync MyBuddyMic" as shown at right. Then right-click the icon to display a menu of items, and then click on **MyBuddyMic Window** shown below.




Microphone Configuration

3. Click the Device Configuration tab.
4. Click on the red button on the microphone base.
5. Delete all of the events in the box for: **Actions for: Main red button.**, by first selection an Event line, and then clicking the **X** button.



6. Add new actions for the Main red button by first clicking the  button, and then choosing the appropriate Event and Action to duplicate the four events shown below.

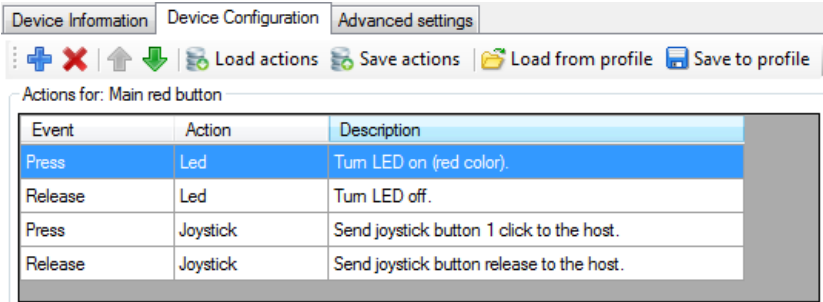

7. Click **Save actions** to download the new configuration to the microphone.

